


Standard Gear Locker - Installation Instructions

Thank you for selecting Gear Locker Lockers from National Mailboxes. We are confident that the quality and construction of these Gear Lockers will be a good investment and provide years of maintenance free use. These instructions are intended to assist you in assembly and installation of a Gear Locker with locked solid front door, locked compartment, and locked foot locker. Individual job conditions will dictate the type of installation fasteners (not included) and whether the lockers must be anchored to the wall, the floor, or both.

Typical Assembly

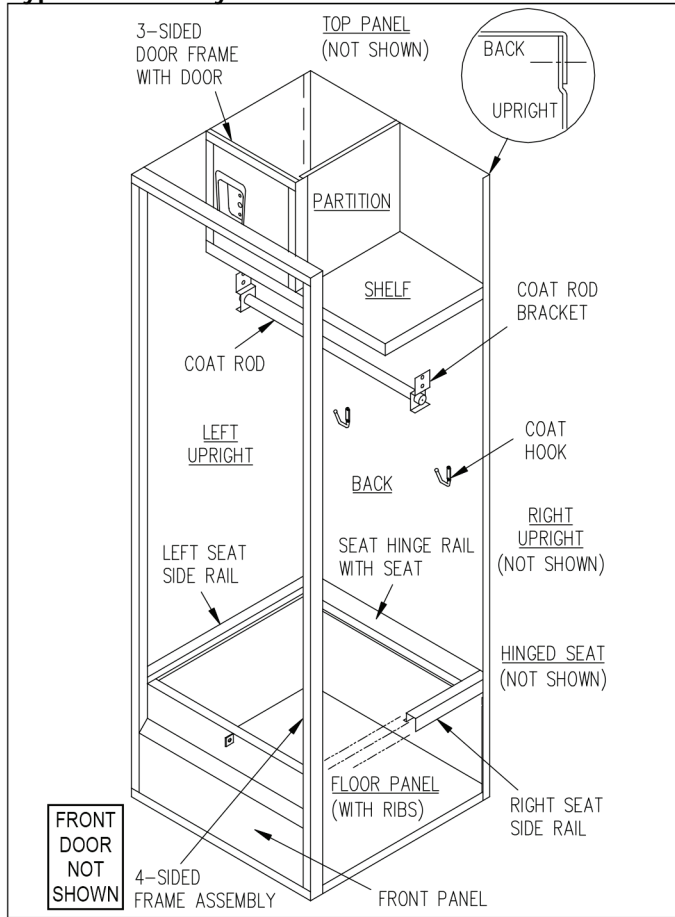

Instructions

1. Assemble left upright to back. Side flange of back should be on the outside. (Heads of the bolts on the outside with the nuts to the inside).
2. Add top panel to the back and upright at the top. The top panel has no stiffening ribs. Top panel flanges should go inside left upright and back. Rectangular notches go toward the front. (Heads of the bolts on the outside with the nuts to the inside).
3. Attach 3-sided door frame and door assembly for top compartment to left upright and top. (Heads of the bolts on the outside and locker top).
4. Attach partition to back, top panel, and right edge of 3-sided door frame.
5. Attach shelf underneath the 3-sided door frame to the left upright, back, and partition.
6. Attach right upright to back, top panel, and shelf.
7. Attach floor panel to back, left upright, and right upright. Floor panel has 2 stiffening ribs underneath. Rectangular notches go to the front.
8. Attach left seat side rail to left upright and right seat side rail to right upright.
9. Attach the hinge rail with seat assembly to the left and right seat side rails.
10. Attach coat hooks, coat rod brackets, and coat rod. (Heads of the bolts on the outside with the nuts to the inside).
11. Attach front panel to 4-sided frame assembly with front door. (Heads of the bolts on the inside of the front panel with the nuts on the inside of the frame).
12. Bolt 4-sided frame assembly with front panel and front door to the assembled locker body. (Heads of the bolts on the outside with the nuts to the inside). ***This completes the assembly of the standard gear locker.***

Notes

Fasteners are provided to assemble the standard gear locker, but fasteners are not provided to anchor the locker to the wall, floor, or another locker. These will vary according to the anchoring conditions.

All bolted connections should be finger tight initially. Square locker frame before tightening all connections.

Adjust all doors to operate freely if required. If built-in locks are installed, make certain locks operate properly before closing doors.



NATIONAL MAILBOXES
A DIVISION OF NMHP INC.

North America's Commercial & Residential Mailbox Leader!

Installation instructions are provided as general guidelines. It is advised that a professional installer be consulted. National Mailboxes assumes no product assembly or installation liability.